


#51

Vienplunksnės frezos, dešininės

Gamyklos standartas

Įvairių konfiguracijų kiaurymėms profiliuose iš lengvųjų lydinų ir plastikų, kurių sienelių storis iki 4mm, gręžti ir frezuoti.

II TIPAS

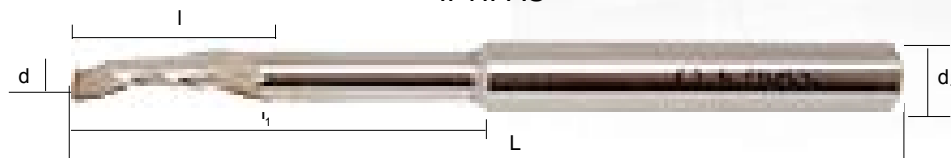

Diametras mm	l mm	l ₁ mm	L mm	d ₁ mm
4,0	16	45	90	8,0
5,0	14	45	80	6,0
5,0	18	35	80	6,0
5,0	18	35	80	8,0
5,0	16	45	80	8,0
5,0	16	45	90	8,0
5,0	18	35	100	8,0
5,0	25	55	100	8,0
5,0	14	75	120	8,0
5,0	14	35	120	8,0
5,0	18	35	120	8,0
6,0	14	35	80	8,0
6,0	14	45	80	8,0
6,0	16	45	90	8,0
6,0	18	35	100	8,0
8,0	14	54	80	8,0
8,0	14	68	100	8,0
8,0	14	90	120	8,0
10,0	14	65	85	10,0
10,0	25	45	90	10,0
10,0	14	75	96	10,0
10,0	14	95	120	10,0