


#16

DIN 338 W

Jobber series parallel shank twist drills

For drilling aluminium, aluminium alloys, copper, brass, bronze and soft plastics

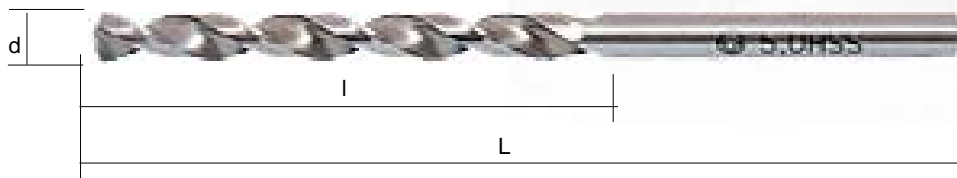

| d mm | L mm | l mm |
|-----------|---------|---------|
| 0,50-0,52 | 22 | 6 |
| 0,55-0,60 | 24 | 7 |
| 0,62-0,65 | 26 | 8 |
| 0,68-0,75 | 28 | 9 |
| 0,78-0,85 | 30 | 10 |
| 0,88-0,95 | 32 | 11 |
| 0,98-1,05 | 34 | 12 |
| 1,10-1,15 | 36 | 14 |
| 1,19-1,30 | 38 | 16 |
| 1,35-1,50 | 40 | 18 |
| 1,55-1,70 | 43 | 20 |
| 1,75-1,90 | 46 | 22 |
| 1,95-2,10 | 49 | 24 |
| 2,15-2,35 | 53 | 27 |
| 2,38-2,65 | 57 | 30 |
| 2,70-3,00 | 61 | 33 |
| 3,10-3,35 | 65 | 36 |
| 3,40-3,70 | 70 | 39 |

| d mm | L mm | l mm |
|-------------|---------|---------|
| 3,80-4,25 | 75 | 43 |
| 4,30-4,70 | 80 | 47 |
| 4,76-5,30 | 86 | 52 |
| 5,40-6,00 | 93 | 57 |
| 6,10-6,70 | 101 | 63 |
| 6,75-7,50 | 109 | 69 |
| 7,54-8,50 | 117 | 75 |
| 8,60-9,50 | 125 | 81 |
| 9,52-10,60 | 133 | 87 |
| 10,70-11,80 | 142 | 94 |
| 11,90-13,20 | 151 | 101 |
| 13,30-14,00 | 160 | 108 |
| 14,25-15,00 | 169 | 114 |
| 15,08-16,00 | 178 | 120 |
| 16,25-16,75 | 184 | 125 |
| 17,00-18,00 | 191 | 130 |
| 18,25-19,00 | 198 | 135 |
| 19,05-20,00 | 205 | 140 |