


#39

DIN 345 N  
 (ГОСТ 10903)

Spiralbohrer mit Morsekegelschaft

Zum Bohren von Kohlenstoffstahl, legiertem Stahl, Konstruktionsstahl und Grauguss

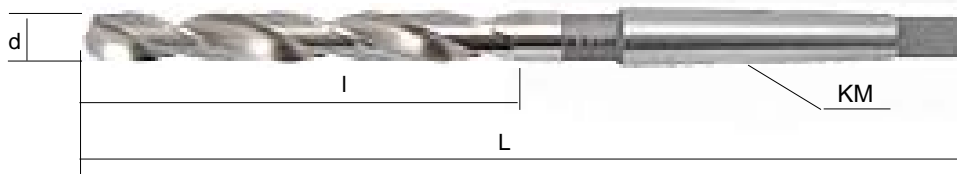

d mm	L mm	l mm	KM
5,00-5,30	133	52	1
5,40-6,00	138	57	
6,10-6,70	144	63	
6,75-7,50	150	69	
7,54-7,94	156	75	
8,00-8,50	156	75	
8,60-9,50	162	81	
9,53-9,92	168	87	
10,00-10,60	175	94	
10,70-11,80	182	101	
11,90-13,20	182	101	2
13,30-14,00	189	108	
14,25-15,00	212	114	
15,08-16,00	218	120	
16,25-17,00	223	125	
17,07-18,00	228	130	
18,25-19,00	233	135	
19,05-20,00	238	140	
20,24-21,03	243	145	3
21,25-22,25	248	150	
22,50-23,02	253	155	
23,25-23,50	276	155	
23,75-25,00	281	160	

d mm	L mm	l mm	KM
25,25-26,50	286	165	3
26,59-28,00	291	170	
28,18-30,00	296	175	
30,16-31,50	301	180	
31,75	306	185	
32,00-33,50	334	185	
33,73-35,50	339	190	
35,72-37,50	344	195	
37,70-40,00	349	200	
40,08-42,50	354	205	
42,86-45,00	359	210	
45,24-47,50	364	215	
47,62-50,00	369	220	5
50,01-50,80	374	225	
51,00-53,00	412	225	
53,18-56,00	417	230	
56,36-60,00	422	235	
60,20-63,00	427	240	
63,10-67,00	432	245	
67,47-71,00	437	250	
71,44-75,00	442	255	
75,41-76,00	447	260	